


Mini R/C Stunt Car




User Manual
GT-4221

Box Contents:

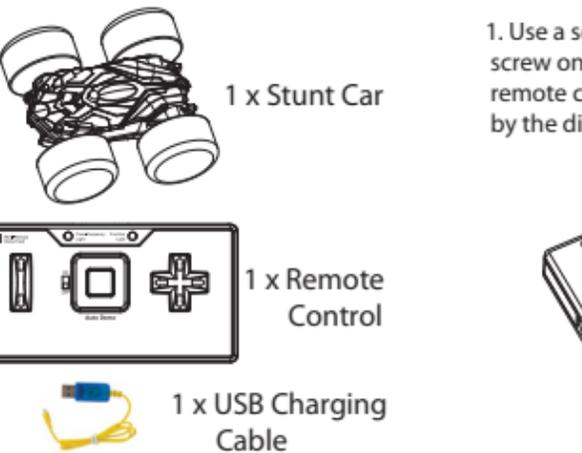

Installation:

1. Use a screwdriver to remove the screw on the battery cover of the remote control. Slide off the battery by the direction of the arrow below:
2. Insert 2 x AA alkaline batteries (not included) according to the correct polarity. Place the battery cover back on and tighten the screw back in place.

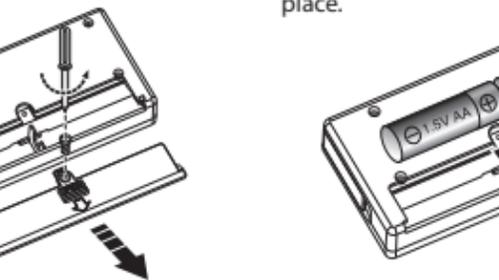



USB Charging:

Connect the USB charging cable to a USB charging socket on a computer or USB mains power adaptor; the LED on the charging cable will be turned off. Plug the opposite end of the USB charging cable to the charging socket of the stunt car. The LED on the USB charging cable will not be lit; it will turn off again once it's fully charged after 20 minutes.





Operation:


1. Press the on/off button on the stunt car to turn on the unit; the red LED will be flashing. Press the switch of the remote control to on; after the frequency has matched to the car, you will be able to drive the stunt car.

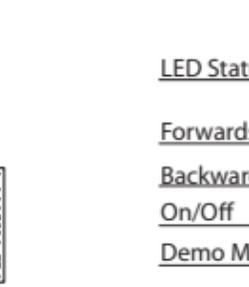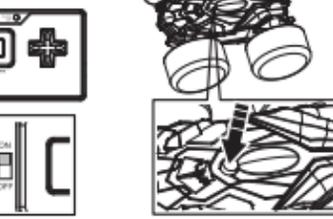

2. Press the forwards and backwards buttons to put the stunt car in either forward or reverse.
3. Press the left or right button to make a left or right turn.
4. You can do a left or right 360° spin by pressing the bottom of top rotation button on the right hand side.
5. Press the auto demo button for the stunt car to drive automatically.

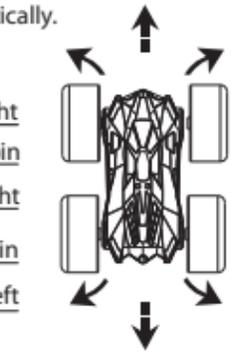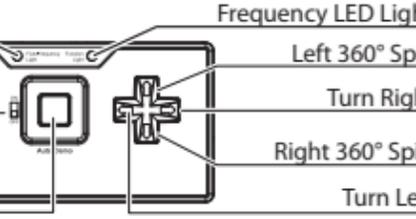

2. Press the forwards and backwards buttons to put the stunt car in either forward or reverse.
3. Press the left or right button to make a left or right turn.
4. You can do a left or right 360° spin by pressing the bottom of top rotation button on the right hand side.
5. Press the auto demo button for the stunt car to drive automatically.

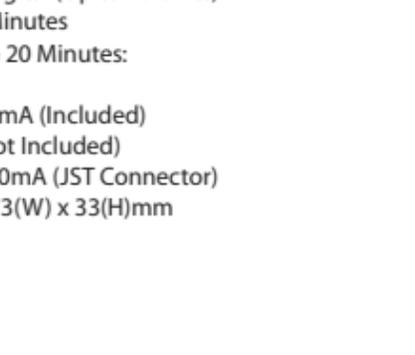

Specifications:


Speed: Up to 6.5km/h
Frequency: 2.4GHz Digital (Up to 10 Units)
Play Time: Up to 12 Minutes
Charging Time: Up to 20 Minutes:
Batteries:
Car: 2.4V Li-ion, 50mA (Included)
Remote: 2 x AA (Not Included)
USB Power: 5VDC, 500mA (JST Connector)
Dimensions: 80(L) x 73(W) x 33(H)mm

Battery Safety:

1. Batteries need to be inserted using the correct polarity
2. Do not mix alkaline, zinc carbon or rechargeable batteries together.
3. Do not mix old and new batteries together.
4. Do not short circuit the batteries together.
5. Rechargeable batteries should be charged under adult supervision only.

Safety:

1. When the car starts to slow down, then charge the stunt car.
2. When the remote control has low battery, the frequency LED light will dim or turn off; please change the batteries of the remote control.
3. Please use the correct USB charging cable otherwise it may damage the battery.
4. Ensure the remote control has the power button turned to off when not in use.



Distributed by:
TechBrands by Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere
NSW 2116 Australia
Ph: 1300 738 555
Int'l: +61 2 8832 3200
Fax: 1300 738 500
www.techbrands.com
Made in China