

POWER TRANSFORMER

751018




PCB Mount

APPLICATIONS:

Low Voltage PCB power supplies, Controllers, Communications and Instruments.

FEATURES:

- Compact Robust PCB mounted Transformer.
- Electrical Authority Approved to AS/NZS3108
- 3.75kV isolation input to output.
- Bifilar wound secondaries for series or parallel connection.
- Pressed metal Mounting pins for mounting rigidity
- Alkaline tin dipped pins for ease of soldering.
- Suitable for wave soldering.

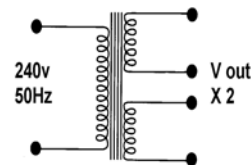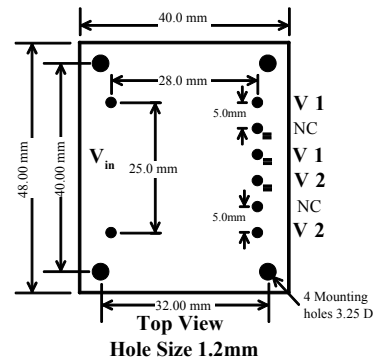

INPUT SPECIFICATIONS:

Input Voltage	240V
Input Frequency	50Hz
Input Protection	Thermal Fuse

OUTPUT SPECIFICATIONS:

Output Voltage	2 x 9V
Output Current	10 VA (550mA)

OPERATING SPECIFICATIONS:

Insulation Class	B
Ambient Temp	40°C

STANDARDS AND APPROVALS:

Safety Standards AS/NZS3108

MECHANICAL SPECIFICATIONS:

Dimensions	
Height	36.5 mm
Width	48mm
Depth	40mm
Weight	250 grams
	16.5 kg carton
Packaging	Unit Qty 1
	Carton Qty 50
	Pallet Qty N/A
	Individual Box YES

* Actual product may be cosmetically different from the picture above.